

**R-22GT
1200 Watts of Power**

Sharp dominates the market in every detail – from the mechanical mastery to the convenient extras. The R-22GT is powered to perform for high-volume restaurants, fast food feeders, hospitals, cafeterias and schools.

R-22GT



Dual Magnetrons

This feature provides dual benefits of even heating plus unsurpassed reliability. If one magnetron fails, oven continues to work at half power.

Top and Bottom Feeding

Provides unparalleled cooking, heating and defrosting performance. Both the top antenna and the bottom antenna have a motor to distribute the microwaves evenly throughout the oven.

Flexible Design

Offers the option of stacking two units. Comes with a mounting plate for easily securing one oven on top of another for space efficiency.

Stainless Steel Cabinet and Cavity

Rugged, dependable and easy-to-care-for stainless steel. Also features extra-strong grab handle, interior oven light, rubber-sealed ceramic shelf and see-through door.

Computerized Touch Control Operation

The 10 microprocessor-controlled programmable Memory pads are ultra-easy to use and dependable, providing one-second increment timing for exact control; easily converted for 20 memories. Built-in safeguards prevent unauthorized changes.

Two-way Programming

Use any of 10 preprogrammed Memory pads or program manually. Also has 3-stage programming for flexible cooking and defrosting capabilities.

SelectaPower™

Provides 10 variable power levels for precise control. Ideal for hard-to-heat-or-defrost foods.

Express Defrost

Quick, easy and automatic! Divides total defrosting time into 3 stages using 3 power levels.

Double Quantity

Automatically provides optimum heating times for two portions. No referencing or guesswork!

Memory Check

Manager or operator can confirm time setting and power level for each Memory pad.

Memory Lock

Prevents stored information from being erased during power interruptions or off times.

Counter Check

Keeps track of how often each feature is used and total number of manual uses.

Lighted Digital Display

Shows programmed and elapsed heating times, plus percentage of microwave power, all with the highest level of accuracy.

Service Door

Lets user replace cavity light easily; no need for a service call or tools.

Intelligent Extras

Signal Control offers a choice of 2 tones; signals the end of cycle. Handy peel-off menu labels for Memory pads.

Demonstration Mode

Lets dealer demonstrate or user practice oven programming with no power in the oven. The timer will count down rapidly.


Built to meet rugged commercial standards. Complies with DHHS & FCC.




R-22GT

1200 watts


HEAVY DUTY

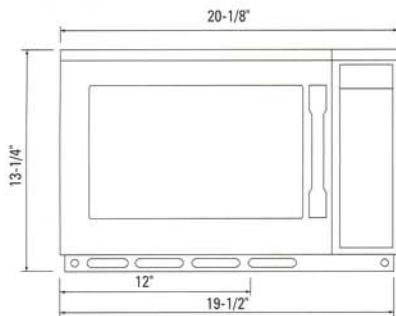

Front view

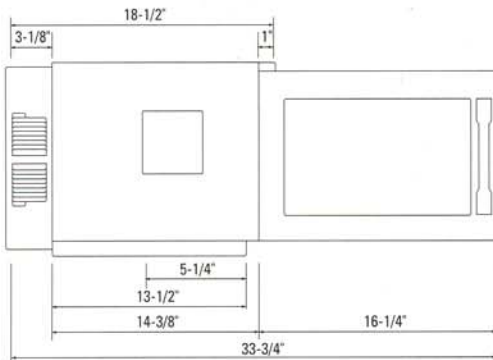

Side view with door open

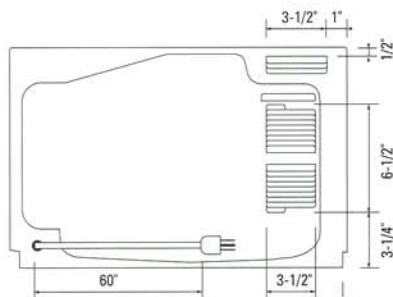

Rear view

R-22GT Specifications

AC Line Voltage:	Single phase, 120V, 60Hz, A.C. only
Receptacle Required:	20 Amp., NEMA 5-20R
AC Power Required:	2.0 kW, 17.0A
Output Power:	1200W (IEC-705-1988 Test Procedure)
Frequency:	2450 MHz
Outside Dimensions:	20 1/8"(W) x 13 1/4"(H) x 18 1/2"(D)
Cavity Dimensions:	13"(W) x 7 1/8"(H) x 13"(D)
Cavity:	Stainless steel
Cabinet:	Stainless steel
Anti-Theft:	Screw hole for 3/16" self-tapping screw, located 12" from hinge side of door and 5 1/4" back from front edge of removable filter.
Safety Switches:	Double safety switches include concealed interlock plus interlock monitor circuit
Safety Standards:	Commercial UL, FCC, DHHS and NSF-4
Net Weight:	Approx. 60 lbs.
Shipping Weight:	Approx 66 lbs.

UPC: 074000611733

To Specify a Sharp R-22GT Commercial Microwave Oven

Oven shall comply with standards set by the U.S. Department of Health and Human Services, FCC, NSF-4 and UL and shall display such labels. Oven shall be equipped with 10 programmable microprocessor-controlled Memory pads, each adjustable in one-second increments from 0 to 30 minutes, without tools. Oven shall also be equipped with optional manual programming. Signal level shall be adjustable. Oven shall have Electrically Alterable Read Only (EAROM) to prevent programmed information from being erased due to power interruptions. Output wattage shall be 1200 watts. Top and bottom antennae feed distribution system with covers shall provide uniform heating pattern. Oven shall be equipped with SelectaPower™ control from 0 to 100 percent power in 10-percent increments. Oven shall have capacity to expand Memory pads from 10 to 20; a 3-stage, 3-power-level defrost system; and an automatic Double Quantity feature. Digital display must show heating time and percentage of power. Oven must have Demonstration Mode. Exterior cabinet shall be of stainless steel construction with see-through oven door. Cavity shall be stainless steel with interior oven light. Bottom of cavity shall consist of rubber-sealed ceramic shelf. Oven shall be equipped with double magnetron tubes with self-diagnostics. Oven shall have a three-year limited warranty on parts and labor in the end user's place of business.

Warranty

Sharp Commercial Microwave Ovens have a reputation for unsurpassed quality in the food-service industry. Sharp Commercial Microwave Ovens are backed by a three-year warranty on parts and labor with service provided in the end-user's place of business. See operation manual for complete details.

Specifications subject to change without notice.

Distributed By:

Microwave Specialties □
8671 Cherry Lane □
Laurel, Maryland 20707 □
1-800-332-2448 www.microwavespecialties.com

Sharp Electronics Corporation

Corporate Headquarters and Executive Offices
 Sharp Plaza, Mahwah, New Jersey 07430-2135
 (201) 529-8711 Fax: (201) 512-2040

www.sharpusa.com